



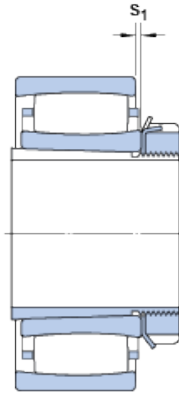

# JieFei Bearing Co., Ltd

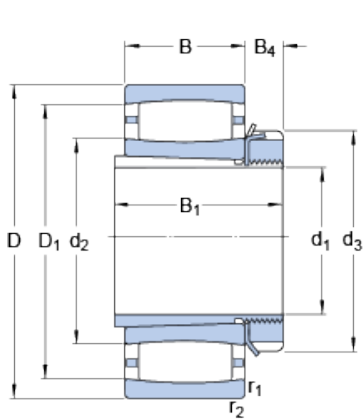

## SKF C 2238 K + H 3138 cylindrical roller bearings

Bearing No. C 2238 K + H 3138

C 2238 K + H 3138 Bearing 2D drawings and 3D CAD models

Size	340x170x141 mm
Bore Diameter	340 mm
Outer Diameter	170 mm
Width	141 mm
$d_1$	170 mm
D	340 mm
$B_1$	141 mm
$d_2$	224 mm
$d_3$	240 mm
$D_1$	296 mm
B	92 mm
$B_4$	30.5 mm
$s_1$	22.5 mm
$r_{1,2}$ - min.	4 mm
$d_a$ - max.	254 mm
$d_b$ - min.	202 mm
$D_a$ - min.	275 mm
$D_a$ - max.	323 mm
$B_a$ - min.	21 mm
$C_a$ - min.	1.6 mm
$r_a$ - max.	3 mm
Basic dynamic load rating - C	1370 kN
Basic static load rating - $C_0$	1730 kN



## JieFei Bearing Co., Ltd

Fatigue load limit - $P_u$	153 kN
Reference speed	1800 r/min
Limiting speed	2400 r/min
Factor - $k_1$	0.108
Factor - $k_2$	0.108
$d_1$	170 mm
$B_1$	141 mm
$d_2$	224 mm
$d_3$	240 mm
$D_1$	296 mm
$B_4$	30.5 mm
$s_1$ max.	22.5 mm
$r_{1,2}$ min.	4 mm
$d_a$ max.	254 mm
$d_b$ min.	202 mm
$D_a$ min.	275 mm
$D_a$ max.	323 mm
$B_a$ min.	21 mm
$C_a$ min.	1.6 mm
$r_a$ max.	3 mm
Basic dynamic load rating C	1370 kN
Basic static load rating $C_0$	1730 kN
Fatigue load limit $P_u$	153 kN
Misalignment factor $k_1$	0.108
Operating clearance factor $k_2$	0.108
Mass bearing + sleeve	43 kg