




# JieFei Bearing Co., Ltd

## 400 mm x 540 mm x 140 mm SKF NNU 4980 B/SPW33 cylindrical roller bearings

Bearing No. NNU 4980 B/SPW33

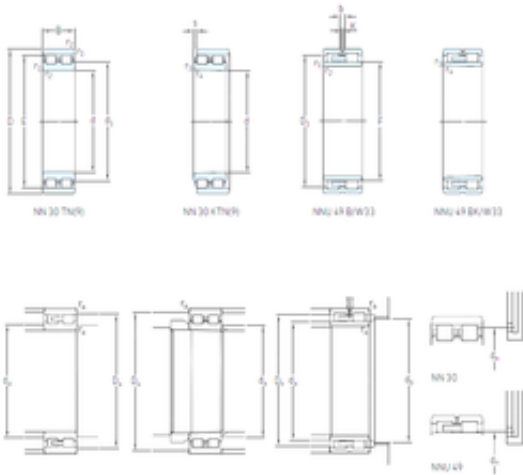

NNU 4980 B/SPW33 Bearing 2D drawings and 3D CAD models

Size	400x540x140 mm
Bore Diameter	400 mm
Outer Diameter	540 mm
Width	140 mm
d	400 mm
D	540 mm
B	140 mm
C	140 mm
b	16,7 mm
r1 min.	4 mm
r2 min.	4 mm
r3 min.	2,5 mm
r4 min.	2,5 mm
D1	490,8 mm
F	446 mm
K	9 mm
da min.	415 mm
da max	441 mm
Da max.	524 mm
db min	451 mm
ra max.	3 mm
S	5,5 mm
dh	– mm
Weight	87,5 Kg
Basic dynamic load rating (C)	1 470 kN



## JieFei Bearing Co., Ltd

Basic static load rating (C <sub>0</sub> )	3 800 kN
(Grease) Lubrication Speed	1 300 r/min
(Oil) Lubrication Speed	1 500 r/min
D <sub>1</sub>	490.8 mm
r <sub>1,2</sub> min.	4 mm
s max.	5.5 mm
d <sub>a</sub> min.	415 mm
d <sub>a</sub> max.	441 mm
d <sub>b</sub> min.	451 mm
D <sub>a</sub> max.	524 mm
r <sub>a</sub> max.	3 mm
Basic dynamic load rating C	1470 kN
Basic static load rating C <sub>0</sub>	3800 kN
Fatigue load limit P <sub>u</sub>	335 kN
Attainable speed for grease lubrication	1300 r/min
Attainable speed for oil-air lubrication	1500 r/min
Mass bearing	88 kg